


MINIATURE LOW TORQUE E Series

Features

- Long life coil spring mechanism
- Low torque rotary actuation
- Clockwise or counter clockwise actuation
- 6 terminal types
- Double rivet sturdy case construction
- 3 contact arrangements

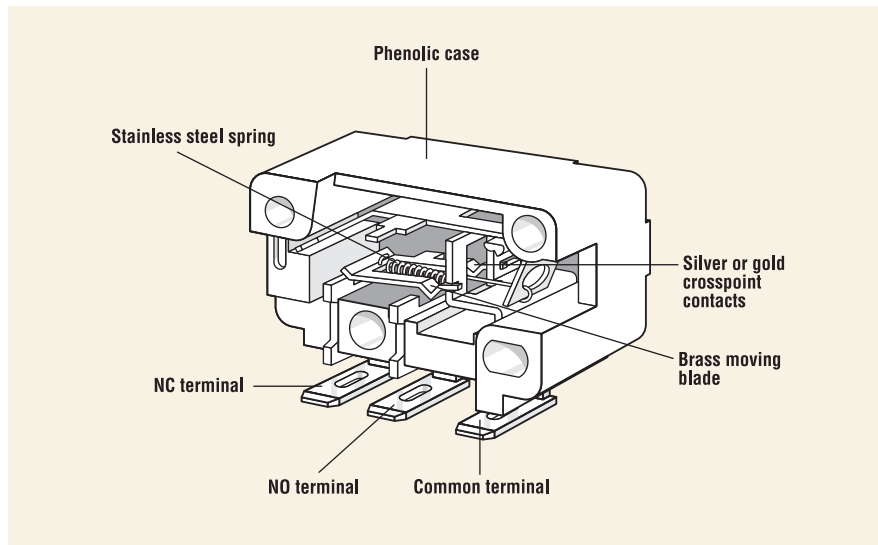

Electrical Ratings

| Switch Series | EN61058 Rating | UL1054 Rating | Electrical Life at Rated Load | |
|---------------|----------------|---------------|---------------------------------------|--------------------------------------|
| | | | According to VDE (Min. Operations) | According to UL (Min. Operations) |
| E51 | N/A | 6A, 250VAC | N/A | 6,000 |
| E53 | N/A | 0.1A, 125VAC | N/A | 6,000 |

Specifications

Electrical

Temperature Rating: -40° to +85°C

Flammability Rating: UL94HB

Materials

Case: General Purpose Phenolic

Terminal: Silver-Plated Brass

Moving Blade: Brass

Contacts: Silver Alloy (E51), Gold Crosspoint (E53)

Spring: Stainless Steel



