




Relay data

- PCB relay with forcibly guided contacts
- Protective separation between coil/control contacts and output contacts (> 8mm) as well as protective separation between the output contacts themselves (> 10mm)
- EN 50205, type A
- Contact mounting:
SLR312 3NO/1NC
SLR222 2NO/2NC
- Small external dimensions
- Mean coil power 0.6W
- Holding power 0.18W
- For Railway Applications: EN 50155

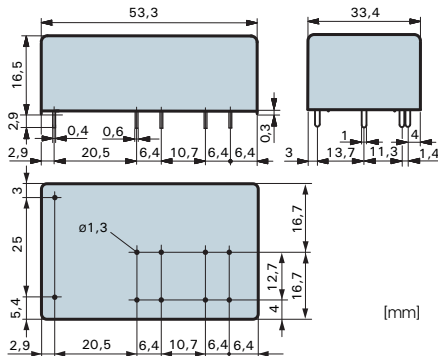

Contact material	AgSnO ₂ +0,2µm Au
Type of contact	Crest contact
Rated switching capacity 250VAC 10A AC1 2'500VA	
Electr. life AC1 (360 cycles/h)	approx. 100'000
Inrush current max.	25A for 20ms
Switching voltage range	5 to 250 VDC/VAC
Switching current range*	10mA to 10A
Switching capacity range* 0.06VA(W) to 2'500VA	
Contact resistance (as delivered)	≤100mΩ/28V/100mA

* Guide values

Standard coils for direct current (other voltages on request)

Nominal voltage VDC	Min. pick-up voltage at 20°C	Drop-out voltage at 20 °C	Nominal current in mA	Resistance in Ohm at 20 °C	Tolerance in %
5	3,5	≥ 0,5	121,0	41	± 10
6	4,2	≥ 0,6	100,0	60	± 10
12	8,4	≥ 1,2	50,0	240	± 10
18	12,6	≥ 1,8	33,3	540	± 10
24	16,8	≥ 2,4	25,2	950	± 10
48	33,6	≥ 4,8	12,6	3'800	± 10
60	42,0	≥ 6,0	10,0	6'000	± 13
110	77,0	≥ 11,0	5,5	20'000	± 15


Ordering example

SLR 3 1 2 24VDC

Coil voltage
Soldering tags
Number of NC contacts
Number of NO contacts
Type designation

General data

Circuit diagram (view on relay upper side)

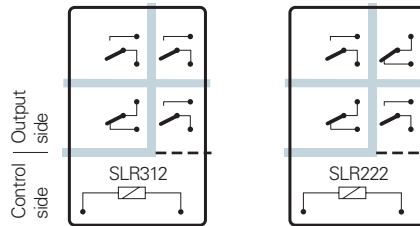

- Basic insulation
- ===== Double or reinforced insulation

Mechanical life	> 10 x 10 ⁶ operations
Switching frequency, mechanical	15Hz
Response time	typically 15ms
Drop-out time**	typically 4ms
Bounce time of NO contact	typically 6ms
Bounce time of NC contact	typically 12ms
Shock resistance 16ms	NO contact > 10g NC contact 6g
Vibration resistance 10-200Hz	NO contact > 5g NC contact 1.5g
Test voltage coil/control contacts	2'500Veff 1min
Test voltage coil-control contacts/output contacts	5'000Veff 1min
Test voltage output contacts as against each other	4'000Veff 1min
Test voltage contact open	1'500Veff 1min
Insulation resistance	10 ¹¹ Ω
Creepage resistance	CTI 250
Weight	approx. 30g
Mounting position	any
Ambient temperature	-40°C to +70°C
Type of protection	RT II
Solder bath temperature	270 °C/5s
Thermal resistance	55K/W
Temperature limit for coil	120°C
Pollution degree	2
Overvoltage category	III
Resistance to short circuiting	1'000A SCPD 10A gG (pre-fuse)

** without spark suppression

Insulation terms


Coil/control contacts NO: Basic insulation
Coil/control contacts to output contacts:
Double or reinforced insulation > 8mm
Output contacts as against each other:
Reinforced insulation > 10mm

Tests, regulations

Approvals	SEV, UL, cUL, TÜV
UL File E188953	Sec. 3
Insulation class IEC 60664-1	250VAC
Protection class II	VDE 0106
Fire protection requirements	UL 94 /V0

Diagrams


Contact lifetime

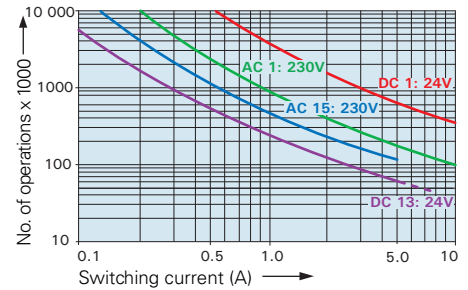

Max. switching characteristics
(determined acc. to DIN EN 60947-5-1 table C2):
AC 15: 230V/5A
DC 13: 24V/7.5A/0.1 Hz
UL 508: C600/R300


Maximal contact load at AC 1 with 230V:
2 contacts each with 10A
3 contacts each with 8.4A

Load limit curve with direct current

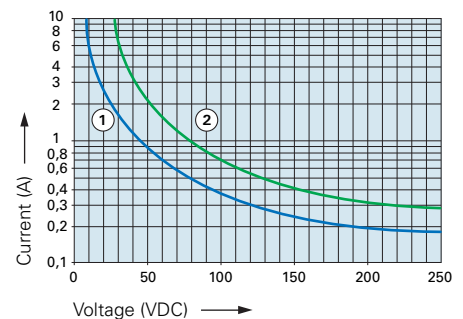

- 1) Inductive load, L/R 40 ms
- 2) Resistive load

Excitation voltage range

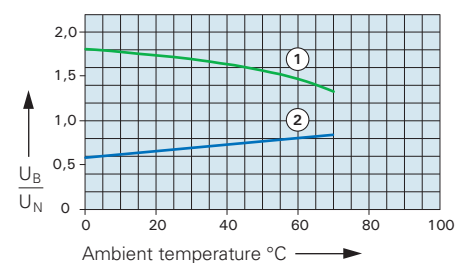

- 1) Max. excitation voltage with contact load ≤ 2A
- 2) Min. excitation voltage (guaranteed values) without previous operation

No heat accumulation due to intrinsic heating of other components.
Continuous duty 100%.